



Chempharm
UNLOCK THE POWER OF ONE

**360° SOLUTIONS FOR
DOORS & WINDOWS**

Automatic Hermetically Sealed Door (Operation Theater)



- **Size:**
 - 1500 mm x 2100 mm
 - 1500 mm x 2300 mm
 - 1000 mm x 2100 mm
- Material of Construction: SS 304/SS 316/GPSP Powder Coated
- Closing & Opening Speed: 250 – 500 mm/second (Adjustable)
- Power Consumption: < 150 watt
- **Special Features:**
 - Safety Sensored Equipped (Foot & Hand Sensor)
 - German Dunken Brush Motor for long life.

X – Ray Shielding (Manual Swing & Automatic Sliding)

- Door Plate fitted with lead sheet of thickness 2 mm to 4 mm to protect human from harmful rays.
- High strength sealing strips.
- **Specification:**
 - Door Weight – Max 150 kg
 - Door width – 800 to 1000 mm
 - Height – 2100 mm



Swing Door (clean Room Doors)

Hollow Metal Door

- Panel: GPSP Powder Coated / SS 304
- Infill: Paper Honeycomb /Al. Honeycomb
- Accessories: Industrial Door Closer/ Push Plate /Door Handle/Lock with Cylinder /Kick Plate / Tower Bolt
- Door Seal at bottom to prevent room pressure and leakage
- Door Seal as special feature.
- Hinges are special antibacterial for industrial application for long life .
- **Specification:**
 - Single & Double Door
- **Size:**
 - Single - 800 - 1000 mm width
 - Double - 1100 - 1500 mm width
 - Height - 2100 - 2300 mm

Automatic Swing Door using Hand Sensors for Labs & clinics


- Noise Free Swing Door using sensors operated .
- Infill: Paper honeycomb
- Door Panel : GPSP Powder coated
- Size: 800 - 1000 mm width / 2100 MM Height



SPECIAL APPLICATIONS DOORS FOR ALL SECTORS

Fire Rated Doors of 60 & 120 Minutes Fire Rating (Single & Double)

The door frames are manufactured from 1.6mm thick galvanized steel sheet pressed from to double rebate profile of size 143mm x 57mm. The door frames and door shutters are finished with 'H' Primer.

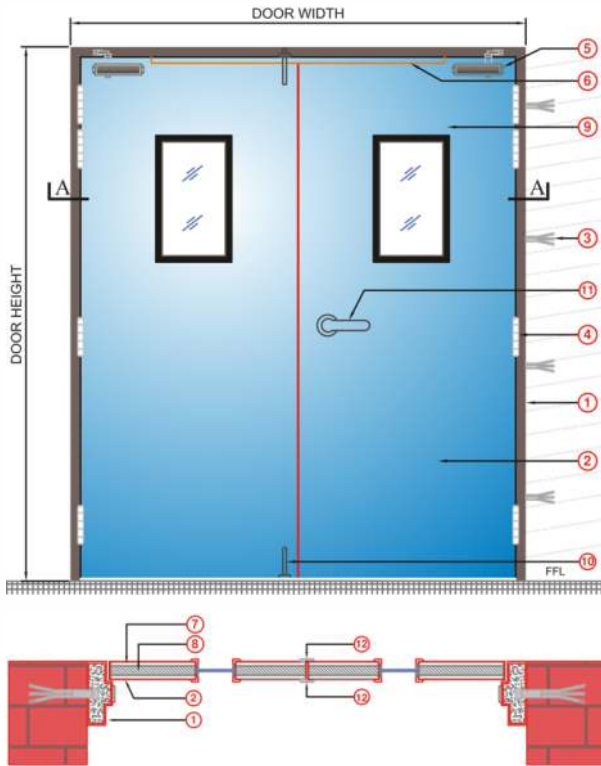

Technical Details

1. Door Frame (143 x 57 mm) 1.6mm Thk GI
2. Door Leaf (46mm Thk) 1.2mm Thk GI.
3. MS Fastener
4. SS Ball Bearing Hinges (100 x 75 x 3mm)
5. Door Closer Fire Rated
6. Door Co-ordinator
7. FR Acrylic sealant
8. Non-combustible core bonded to Both faces of sheet 64 Kg/M3 (1HR)/144 Kg/M3 (2Hr)
9. Vision Panel - Clear or Clear wired
10. SSTower Bolt
11. Mortise Lock/Door Handles Fire Rated
12. MS Strip 32 x 2.5mm

Features –

- 2 Hour Rated CBRI certified
- Infill Rockwool
- Panel of GPSP powder coated
- Fitted with fire rated glass of 2 hour
- All accessories are fire rated

Specifications

- Size : 800 – 1500 mm (Single & Double)
- Height – 2100 mm
- View Glass 300 x 400 mm or as per client required
- Rockwool – Resin Free

Fire Rated Door (Fully Glazed Glass Doors)

They are single or double glazed doors using full view glass panel fire rated.

Mainly used for

- Office block,
- Restaurants
- Lobby, etc

Glass:

Certified fire glasses by reputed makes



Emergency Exit Door

Emergency Exit Door with Panic bar.

Features:

- Panic bar fitted for single & double door
- Infill – Paper Honeycomb
- Door Panel of GPSP powder coated
- Fitted with Push & Kick Plate

Specification:

- Size – 800 mm for Single width
- 1000 – 1500 mm for double width
- Height 2100 mm
- View glass 300 x 400 or as per client required




Wooden Fire Doors of 60 & 120 Minutes Fire Rating

Wooden Door Frame of 115mm x 70mm section with one coat of anti-termite fire retardant Primer.

Technical Details

1. Wood Frame 145 x 70mm
2. Door Leaf 48mm Thk.
3. MS Fastener
4. SS Ball Bearing Hinges (100 x 75 x 3mm)
5. Door Closer Fire Rated
6. Door Handle / Mortise Lock Fire Rated
7. 10 x 4mm Fire & Smoke Seal
8. 18mm Thk Insulation Filler
9. Calcium Silicate Board 6mm Thk
10. Commercial Ply 6mm Thk
11. Hard Wood Beading 30 x 20mm
12. Perimeter Stile 100 x 18mm

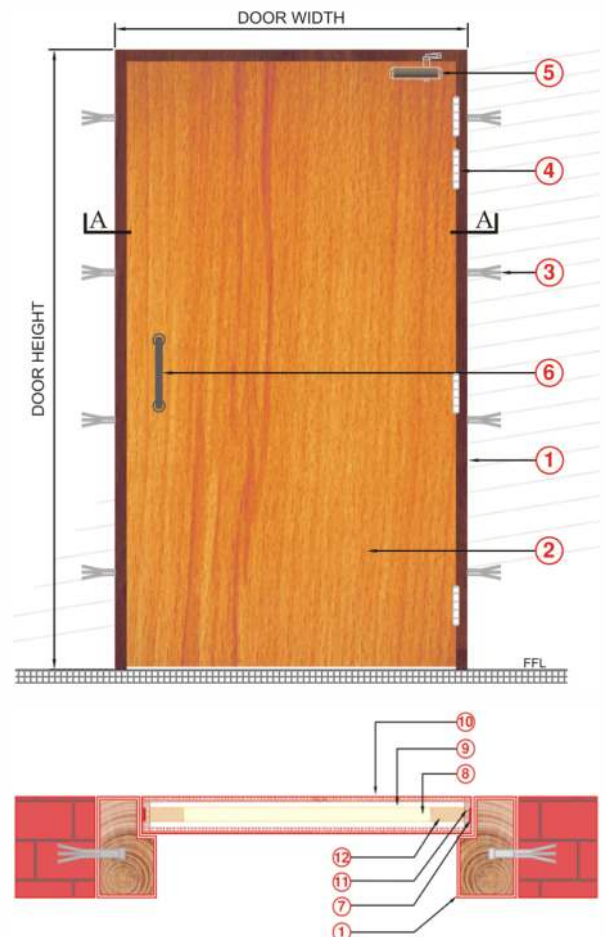

GENERAL APPLICATION DOOR

1. Floor mounted swing door with both side opening

Features :

- Heavy duty floor springs for both side opening
- specifications same as emergency exit doors



2. Sensor Operated Double Sliding Door

- Public area door generally used at entrance of shopping Malls / Hotels / Commercial / Offices etc.
- German Motors and Sensors are used to give lifelong strength.



3. Manual Sliding Door for Warehouse / Stores

- GPSP Powder Coated Door panel fitted with handle and sliding arrangement with bottom grouting rail
- **Sizes**
 - 1500x2100 mm
 - 1500x2300 mm
 - 1000x2100 mm



WINDOWS

Feature

- Double glaze toughened glass under for Industrial, Hospitals, General application
- Vaccumnized with silica for moisture absorption .
- Windows are sealed with special silicon and 3M tape .
- Size: 500 mm to 2000 mm width
- Height: 1000 mm to 2000 mm .
- Application: Industrial / Commercial /Clean Room / Medical for Civil and for Panels .




The double glass window are used for partition and in civil construction the glass used can be of any height upto 2 mtr.The vaccumized arrangement between the windows makes the glass look aesthetically good as well as ensures the window does not gets frosted during winter season.

DOOR ACCESSORIES



CYLINDER PIN-TUMBLER LOCK

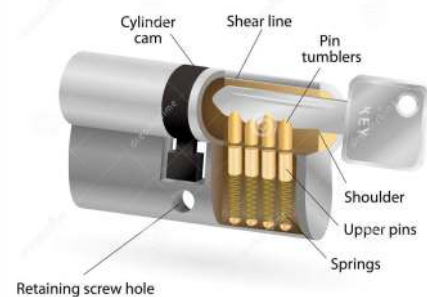

FOOT SENSOR



HAND SENSOR



MICRO SENSOR



OUR CLIENT



Addresses:-

Head Off.:

Chempharm Industries India Pvt. Ltd.
C-71, Sector-63, Noida-201301, UP, India
Phone: +91-120-4694900
Fax: +91-120-4694999

Registered Off:

60, Dayanand Marg, Daryaganj,
New Delhi-110002, India
Phone: +91-11-23270627 / 23287706

Branches:

Mumbai: 601, 6th Floor, Wing c, Plot No.13,
Sector 11, Kukreja Centre, CBD, Belapur,
Navi Mumbai - 400 614
Ph.: +91-22-65118680 / 40809404
Fax: +91-22-27564333

Factory:

Khasra No: 84/11/2, 12 &13, Village Akbarpur Barota,
Distt. Sonapat - 131028, Haryana
Phone : +91-130-2325060, 2325059

E-mail: sales@chempharmindia.com

Website: www.chempharmindia.com